

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/001094

International filing date: 23 March 2005 (23.03.2005)

Document type: Certified copy of priority document


Document details: Country/Office: GB  
Number: 0406861.5  
Filing date: 26 March 2004 (26.03.2004)

Date of receipt at the International Bureau: 02 May 2005 (02.05.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

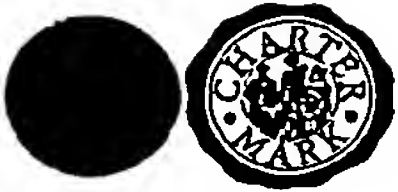

GB05/1094



INVESTOR IN PEOPLE


The Patent Office  
 Concept House  
 Cardiff Road  
 Newport  
 South Wales  
 NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

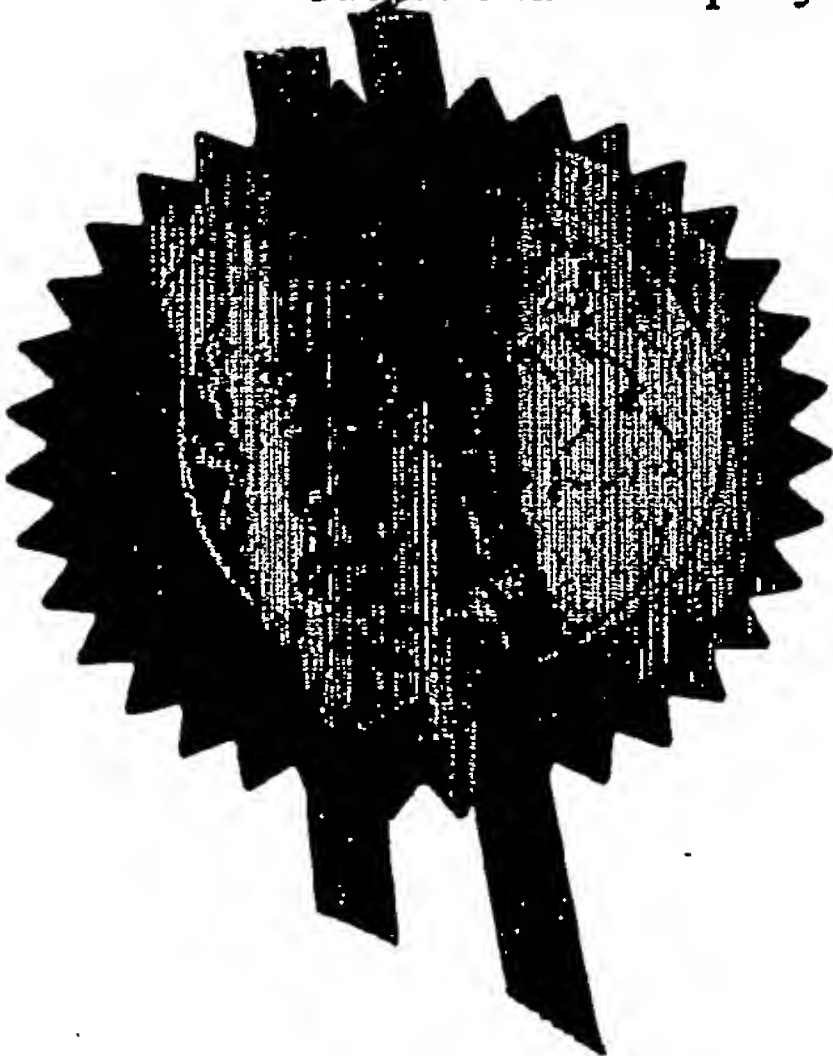

Signed

Dated 14 April 2005

The  
Patent  
Office

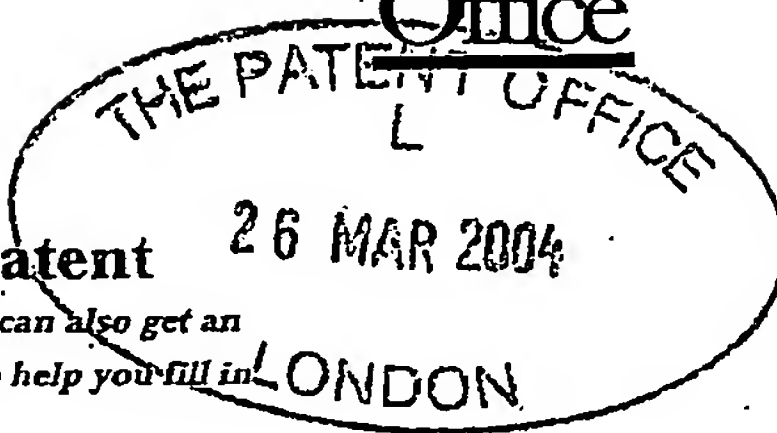

1/77

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP9 1RH

1. Your reference

305609GB/PDJ

27/03/04 5004717 2 002525  
P01/7700 0.00-0406561.5 CHEQUE

2. Patent application number

(The Patent Office will fill in this part)

0406861.5

26 MAR 2004

3. Full name, address and postcode of the or of each applicant (underline all surnames)

University of Southampton,  
Highfield,  
Southampton,  
Hampshire SO17 1BJ,  
United Kingdom

Patents ADP number (if you know it)

798470001

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4. Title of the invention

An Electromagnetic Device for Converting Mechanical Vibrational Energy into Electrical Energy

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

PAGE WHITE & FARRER  
54 Doughty Street,  
London WC1N 2LS,  
United Kingdom

Patents ADP number (if you know it)

1255003

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

|                                  |              |
|----------------------------------|--------------|
| Continuation sheets of this form | 0            |
| Description                      | 14           |
| Claim(s)                         | 6 <i>DL</i>  |
| Abstract                         | 1            |
| Drawing(s)                       | 3 <i>+ 3</i> |

10. If you are also filing any of the following, state how many against each item.

|  |            |
|--|------------|
| Priority documents   | 0          |
| Translations of priority documents   | 0          |
| Statement of inventorship and right to grant of a patent (Patents Form 7/77) | 1 <i>✓</i> |
| Request for preliminary examination and search (Patents Form 9/77)           | 1 <i>✓</i> |
| Request for substantive examination (Patents Form 10/77)                     | 0          |
| Any other documents (please specify)   | 0          |

11. I/We request the grant of a patent on the basis of this application.

Signature *[Signature]* Date 25/03/04

PAGE WHITE & FARRER

12. Name and daytime telephone number of person to contact in the United Kingdom

P.D. JENKINS  
(020) 7831-7929

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DUPLICATE

An electromagnetic device for converting mechanical  
vibrational energy into electrical energy

The present invention relates to an electromagnetic generator for converting mechanical vibrational energy into electrical energy. In particular, the present invention relates to such a device which is a miniature generator capable of converting ambient vibration energy into electrical energy for use, for example, in powering intelligent sensor systems. Such a system can be used in inaccessible areas where wires cannot be practically attached to provide power or transmit sensor data.

There is currently an increasing level of research activity in the area of alternative power sources for micro electrical mechanical systems (MEMS) devices, such devices being described in the art as being used for 'energy harvesting' and as 'parasitic power sources'. Such power sources are currently being investigated for powering wireless sensors.

It is known to use an electromagnetic generator for harvesting useful electrical power from ambient vibrations. A typical magnet-coil generator consists of a spring-mass combination attached to a magnet or coil in such a manner that when the system vibrates, a coil cuts through the flux formed by a magnetic core. The mass which is moved when vibrated is mounted on a cantilever beam. The beam can either be connected to the magnetic core, with the coil fixed relative to an enclosure for the device, or vice versa.

In a paper entitled "Design and fabrication of a new vibration based electromechanical power generator", by Glynne-Jones et al, published in Sensors and Actuators A92, 2001, pp.335-342, an electromechanical generator was disclosed consisting of a cantilever beam supported by a housing. A mass on the beam was made up of two magnets mounted on a keeper to form a C-shaped core. A coil was placed in the air-gap between the magnets at right angles to the direction of movement of the mass on the cantilever beam. While this prior disclosure by some of the present inventors produced a useful electromechanical generator, there is still a need to enhance the efficiency of the conversion of mechanical vibration energy into electrical energy, and thereby into useful electrical power.

In a later paper entitled "An electromagnetic, vibration-powered generator for intelligent sensor systems", by P Glynne-Jones, MJ Tudor, SP Beeby, NM White, Department of Electronics and Computer Science, University of Southampton, Southampton, SO17 1BJ, Hampshire, England, which was published at a conference entitled "Eurosensors XV1" held in 2002 in Prague, Czech Republic, an improved electromechanical generator was disclosed. The electromechanical generator incorporated four magnets, which created a magnetic field through a greater proportion of the length of each coil winding when compared to double or single magnet designs. The magnets and core structure of the device are illustrated in Figure 1.

A web page "<http://www.iee.org/oncomms/pn/measurement/Steve%20Beeby.pdf>" is a copy of a presentation entitled "Kinetic energy harvesting for wireless energy systems" by S P Beeby et al, made at the Institute of Electrical Engineers (IEE) in the United Kingdom at a seminar on "Wheatstone Measurement" held on 11 December 2002. That presentation similarly disclosed the structure and use of an electromechanical generator having the magnet, core and coil construction shown in Figure 1.

The magnetic core structure, designated generally as 2, in Figure 1 comprises four magnets 4,6,8,10. Each magnet 4,6,8,10 is substantially block shaped having opposed ends of opposite polarity. The four magnets 4,6,8,10 are disposed in two magnet pairs, with each pair of magnets 4,6;8,10 being assembled with a respective keeper plate 12,14 of ferromagnetic material, for example steel. For each pair of magnets 4,6;8,10, the end of one magnet (for example magnet 4) having a first polarity (for example N for the magnet 4 in Figure 2) is assembled against the respective keeper plate (for example keeper plate 12 in Figure 2) and an end of opposite polarity (for example S) of the other magnet (magnet 6 in Figure 1) is assembled against the same keeper plate (keeper plate 12). The two pairs of magnets 4,6;8,10 are mounted in an opposing manner, with magnet ends 16,18;20,22 of opposite polarity spaced from and facing each other, and with the magnetic flux being guided around the two opposed outside edges of the magnetic core 2 by means of the two keeper plates 12,14, thereby to define a magnetic circuit.

With this arrangement, a single elongate slot 24 is defined between the two opposed magnet pairs 4,6 and 8,10 and there are also defined in the magnetic circuit two air gaps



26,28 therein, each air gap 26,28 being defined between respective opposed magnet ends 16,18;20,22. As shown in Figure 1, the coil 30 is disposed in the slot 24. The magnetic circuit is mounted on a cantilever beam (not shown), for example a U-shaped member, with each end of the U-shaped member connected to a respective pair of magnets 4,6;8,10. When the electromechanical generator is subject to mechanical vibration, the cantilever beam can correspondingly vibrate, in an up and down direction with respect to the magnetic circuit, as shown by the arrows indicating magnet movement in Figure 1. This causes an electrical current to be generated in the coil 30.

For each of these latter two prior disclosures made by some of the present inventors, although the disclosed electromechanical generator had a good efficiency, there is still a need to improve the design to enhance the efficiency of electrical power generation from mechanical vibrations.

US-A-6304176 in the name of Rockwell Technologies LLC discloses a parasitically powered sensing device for monitoring an industrial system. A tuned transducer converts stray energy emitted by the system into an electrical potential for consumption by a remote sensing device and/or a wireless communications link. The parasitic transducer may be a piezoelectric crystal element coupled to a tuned mechanical oscillator. Alternatively, the sensing element and transducer may be in the form of a micro-mechanical system. However, no specific magnet, core and coil arrangement is disclosed.

The present invention aims to provide to an improved electromagnetic device for converting mechanical vibrational energy into electrical energy.

The present invention accordingly provides an electromagnetic generator comprising two magnets and a coil disposed therebetween, the two magnets being configured to define therebetween a region of magnetic flux in which the coil is disposed whereby relative movement between the coil and the magnets generates an electrical current in the coil, and a vibratable first mount for each of the magnets and a vibratable second mount for the coil whereby each of the at least two magnets and the coil are respectively vibratable about a respective central position.

The present invention yet further provides an electromagnetic generator comprising first and second coils each disposed between a respective pair of magnets which are configured to define therebetween a region of magnetic flux in which the respective coil is disposed whereby relative movement between the respective coil and the respective magnets generates an electrical current in the respective coil, and wherein the first and second coils each have different respective resonant frequencies when vibrated relative to their respective magnets.

Embodiments of the present invention will now be described by way of example only with reference to the accompanying drawings, in which:

Figure 1 is a schematic side elevation of a configuration for the magnets, core and coil of a known electromagnetic device for converting mechanical vibrational energy into electrical energy;

Figure 2 is a schematic side elevation of an electromechanical generator in accordance with a first embodiment of the present invention;

Figure 3 is a schematic side elevation of an electromechanical generator in accordance with a second embodiment of the present invention;

Figure 4 is a schematic side elevation of an electromechanical generator in accordance with a third embodiment of the present invention; and

Figure 5 is a schematic side elevation of an electromechanical generator in accordance with a fourth embodiment of the present invention.

Figure 2 shows an electromechanical generator in accordance with a first embodiment of the present invention. In this embodiment, a resonating structure, designated generally as 102, is provided on which a coil 104 is mounted between a pair of opposed magnets 106, 108. The poles of the magnets 106, 108 which face the coil 104 are of opposite polarity (in Figure 1 the upper magnet 106 has a south pole S facing the coil 104 and the lower magnet 108 has a north pole N facing the coil 104). The resonating structure 102



comprises a base 110 from which extend three elongate beams 112, 114, 116 which are parallel and coplanar. The base 110 and the three elongate beams 112, 114, 116 are integral. The three elongate beams 112, 114, 116 typically have a square or rectangular cross-section. The coil 104 is mounted on a centre beam 114 and a respective magnet 106, 108 is mounted on each of the two outer beams 112, 116. The coil 104 and magnets 106, 108 are mounted at a free end of the respective beam 114 and 112, 116. The magnets 106, 108 are mounted so that the two magnet faces 118, 120 facing the coil 104 have opposite polarity, as stated above. In this way, the coil 104 is mounted in the magnetic flux extending between the two opposed magnets 106, 108.

In the rest position, as shown in Figure 2, the two magnets 106, 108 and the coil 104 are all aligned along a common axis A-A, orthogonal to the length of the three beams 112, 114, 116. The windings (not shown) of the coil 104 are orthogonal to this axis A-A and the coil 104 is connected to wires (not shown) which in use deliver electrical current generated in the coil 104 by relative movement of the coil 104 and the magnets 106, 108 so that electrical energy may be harvested by such movement.

The centre beam 114 has a mass which is substantially the same as that of the two outer beams 112, 116 combined, which have equal mass. In other words, the mass of each outer beam 112, 116 is substantially one half of the mass of the centre beam 114.

Preferably, to improve the degree of coupling, it is desirable to choose a type of magnet 106, 108 that will produce a strong flux density. Rare earth magnets are ideal for this application, and offer up to 5 times the magnetic energy density of conventional Alnico magnets. Neodymium Iron Boron (NdFeB) magnets have the most powerful magnetic properties per cubic cm known at this time, and can operate at up to 120°C. If higher temperature operation is required, the less powerful Samarium Cobalt can be used, with a working temperature of up to 250°C.

However, in accordance with the present invention it is alternatively possible for the magnets to be produced by depositing, for example by printing, magnetic material onto the respective beams rather than attach preformed magnets to the beams. This is particularly applicable to miniaturised devices, and can lower the production cost by using known

batch fabrication processes to form layers on a substrate which is to form the integral base and beams.

The integral base and beams may be composed of a metal or metal alloy, or a semiconductor such as silicon.

The coil 104 is characterised by the proportion of the coil that passes through the magnetic field, the number of turns in the coil, and its series resistance. Second-order effects such as coil inductance can often be ignored due to the low frequency of many applications. Two types of coil may be used in the present invention: wound coils, and printed coils.

A printed coil can be formed by screen-printing layers of conductive materials and insulators onto a substrate in much the same manner as printed circuit boards (PCBs) are produced. A printed coil can be made very thin as printed layers will typically be  $10\mu\text{m}$  thick, making this approach particularly attractive for small-scale devices. A printed coil may also be easier to manufacture as it only involves standard thick-film printing processes, as opposed to a wound coil, which becomes more difficult to manufacture particularly as the scale decreases. The disadvantage of a printed coil is that the small thickness of each layer will result in a high series resistance for the coil. If windings of a larger thickness than are traditionally available from thick-film technology (e.g.  $>50\mu\text{m}$ ) are required a wound coil will be more suitable and economic to manufacture. Printed coils have the added advantage of already being attached to a substrate, which may add rigidity to the coil, and hence decrease the clearance required between the coil and the magnets of the outer layers. Additionally the coil may be formed by lithographic processes such as are those used to define structures on a silicon wafer in the technical field of micro-engineering. These processes are well known in the prior art and successive layers can be built up by a variety of processes such as sputtering, evaporation or electroplating and are not limited to deposition on silicon wafers but can be applied to any wafer like substrate.

In use, the base 110 is mounted at a single mounting point to a host device (not shown) from which energy is to be harvested as a result of vibration of the host device. In this way, the inertial force produced by the vibration of the host is effectively applied to the

electromechanical generator at that mounting point. The electromechanical generator is mounted on the host device so as to achieve a most preferred mode of vibration, which is that the three beams 112, 114, 116 vibrate out of the plane of the resonating structure 102 (i.e. out of the plane of the drawing of Figure 2). The beams 112, 114, 116 vibrate therefore in a manner similar to the tines of a triple beam double ended tuning fork. Most preferably, the vibration of the beams 112, 114, 116 is in a preferred resonant mode so that the vibration of the coil 104 on the centre beam 114 is in anti-phase to that of each of the two magnets 106, 108 mounted on the outer beams 112, 116 (i.e. the phase difference between the coil 104 and the magnets 106, 108 is  $180^\circ$ ). This antiphase vibrational relationship between the coil 104 on the one hand and the magnets 106, 108 (and thus the magnetic flux) on the other hand thereby allows maximum relative displacement of the coil 104 and the magnets 106, 108 and thus maximum cutting of the magnetic flux by the movement of the coil 104 relative to the magnets 106, 108.

In alternative embodiments which are modifications of the embodiment of Figure 2, the coil and/or the magnets may be mounted at other points on the beams, other than at the beam ends, and additionally or alternatively the magnets may be mounted on the centre beam and coils may be mounted on the two outer beams. In a further modification, links or stiffening members may be additionally incorporated on or between the beams carrying the magnets in order to stiffen those beams, thereby to oppose the mutually attracted force of the two magnets and stop the beams from being distorted or damaged.

In the known device of Figure 1, the magnets and the coil are required to be mounted to respective elements (the magnets to a common cantilever element and the coil to a fixed element). The requirement for two such mounting elements complicates the installation of the electromagnetic generator on the host device. In contrast, the electromagnetic generator of the present invention provides a common mount, namely the base, for all the magnets and coil(s), and such a single mount can more readily be attached to the host device in a simple manner.

A further embodiment of an electromechanical generator in accordance with the present invention is illustrated in Figure 3. This embodiment is a modification of the previous embodiment, in that five beams 222, 224, 226, 228, 230 extend from a common base 242.

The beams 222, 224, 226, 228, 230 define a linear and coplanar array of beams 222, 224, 226, 228, 230 and respective magnets 232, 234, 236 are mounted at the end of each of the first, third and fifth beams 222, 226, 230 and a respective coil 238, 240 is mounted at the end of each of the second and fourth beams 224, 228. The magnets 232, 234, 236 and coils 38, 240 are mounted coaxially along a common axis B-B, with each coil 238, 240 being located between opposed magnet poles of opposite polarity.

Again, when the electromagnetic generator is mounted via the base 242 to a host device (not shown), when the host device is subject to mechanical vibration, this vibration is transmitted to the five beams 222, 224, 226, 228, 230 of the electromechanical generator which vibrate in a manner similar to the tines of a triple beam double ended tuning fork, namely out of the plane of the resonating structure (and the plane of the drawing of Figure 3). In the chosen mode of vibration the beams 222, 226, 230 carrying the magnets 222, 226, 230 and the beams 224, 228 carrying the coils 224, 228, as described above for the first embodiment, the two beams 224, 228 carrying the coils 24, 228 vibrate in phase with each other, and in anti-phase with the three beams 222, 226, 230 carrying the magnets 222, 226, 230. Again, this maximises the cutting of the magnetic flux by the coils 224, 228 for a given vibration amplitude and frequency.

The embodiment of Figure 3 may be modified so as to provide a different resonant frequency for each of the two coil/magnet combinations. Such difference resonant frequencies may in any event occur as a result of normal production tolerances, but preferably such a resonant frequency difference is deliberately provided in the device, for example by modifying the mass of the beams, in particular by attaching additional mass to the beams, (for example by selection of the mass of the magnets and/or the coils), and/or by modifying the beam dimensions, such as the cross-sectional area and/or beam length. This provision of plural resonant frequencies in a single electromechanical generator correspondingly broadens the frequency range over which electrical energy can be generated.

The embodiment of Figure 3 may be further modified so as to provide additional beams carrying magnets or coils so as to provide any number of beam "fingers" whilst preserving a linear array.

This embodiment permits the mounting of multiple magnets and multiple coils in a structure requiring a small geometric volume and area, yet increases the efficiency of the generation of electrical current by the provision of multiple coil/magnet combinations. A common magnet (in this embodiment the magnet on the third beam) is shared between the two coil/magnet combinations.

The multiple coil embodiment of Figure 3 may be modified so as to enhance the provision of multiple resonant frequencies, one for each coil, in the single electromagnetic generator. The modification consists of decoupling of the resonating structures, by avoiding the provision of a common vibratable beam shared between adjacent resonating structures. Therefore as shown in Figure 4, an additional beam may be provided between the two coils, so that each beam of the pair is associated with a respective resonating structure. Figure 4 shows a further embodiment comprising a six beam structure consisting of two, three beam structures each of which has a slightly different resonant frequency. Effectively, two independent electromechanical generators are provided in a common device since the structures are decoupled from each other to avoid them having a single resonant mode. A first resonant structure 400 consists of two outer beams 402, 404 each carrying a respective magnet 406, 408 and a central beam 410 carrying a coil 412. A second resonant structure 420, adjacent to the first, consists of two outer beams 422, 424 each carrying a respective magnet 426, 428 and a central beam 430 carrying a coil 432. The first and second resonant structures 400, 420 are integral with a common base 440 to constitute a single electromagnetic generator 442. The first and second resonant structures 400, 420 are coplanar, but this is not essential, and the respective three beam structures may extend in different or opposite directions. In addition, more than two decoupled resonating structures may be provided in further modifications in accordance with the invention.

A further embodiment of an electromagnetic generator in accordance with the present invention is illustrated in Figure 5. In this embodiment, a succession of coils 350 and magnets 352 are mounted on the end of respective beams 354, 356 in an alternating configuration around a common central base 358 having a geometrical shape, which may, as in the illustrated embodiment, for example be a circle. The beams 354, 356 extend



radially outwardly from the base 358, which in use is mounted on the host device (not shown) from which energy is to be harvested. Every other beam 354 has mounted thereon a respective coil 350 and the remaining beams 356 have mounted thereon a respective magnet 352, with the magnets 352 being mounted so that each coil 350 is disposed between opposed magnetic faces of opposite polarity. The coils 350 and magnets 352 are mounted around a circular line of common radius, by the beams 354, 356 having a common length.

By providing multiple coil/magnet combinations, as described above with the previous embodiment, this permits the possibility of slightly different resonant frequencies for each coil and magnet unit. This offers a broader frequency band which is responsive to vibrations from the host. Again, each coil 350 is arranged to vibrate on its respective beam 354 substantially in anti-phase with its corresponding magnets 352 which are themselves mounted on respective beams 356. As for the embodiment of Figure 4, additional beams may be provided to decouple each resonating structure, consisting of a coil between a pair of magnets, from its neighbouring resonating structure(s).

In this embodiment, a circular geometry for the electromagnetic generator makes the most efficient use of space and magnets. However, the beams may equally well be arranged in another polygonal shape, such as a square, rectangular or indeed any geometric shape.

For efficient energy conversion, in the embodiments of the invention the beams carrying the magnets and the coils(s) are excited at a resonant frequency. This resonant frequency is sensitive to beam amplitude and environmental temperature. It is also desired to determine the maximum beam amplitude that should be allowed to prevent damage through over straining the beam material. Preferably, the design includes a vacuum-sealed housing so that a vacuum surrounds the entire device.

In the illustrated embodiments, although each block-shaped magnet having a longitudinal direction extending between the ends of opposite polarity of the magnet is shown to have a rectangular transverse cross-section, the cross-section may be varied, for example by providing a circular cross-section.



This invention therefore generally provides a resonating structure on to which a coil and magnet combination, or plural coil and magnet combinations, can be mounted. The coils and magnets can have simple single magnet or double magnet structures, or more complicated multiple magnet structures. The invention also provides a resonating structure which is mounted at a single point on the host so the inertial force produced by the vibration is effectively applied at this mounting point. It also provides a structure with greater ease of mounting than the prior art since in the prior art the magnet and coil must be mounted independently. This present invention provides a single mounting point for the magnets and coil.

In the preferred mode of resonance the vibration of the coil is in anti-phase to that of the magnets allowing maximum relative displacement and maximum flux cutting to take place. The present invention provides a means of moving the coil in anti-phase with the magnets so as to provide a greater relative velocity between the magnets and the coil. By incorporating multiple cantilevers, this allows the possibility of having slightly different resonant frequencies for each coil and magnet unit cell thus offering a broader band response to vibrations. It also provides a means of extending the structure to allow the mounting of multiple magnets and coils in a small geometry. This structure provides a means of widening the frequency range over which energy can be generated by incorporating multiple resonances within a single structure. Indeed this effect may occur naturally due to normal production tolerances.

Although tuning forks have been well known for many years, and also vibrating beams are known for use in devices such as force sensors, the inventors believe that the use in electromechanical generators of vibration devices having a structure similar to tuning forks but additionally to which both the magnets and the coil(s) are mounted for vibration at a resonant frequency is not known in the art.

In accordance with a preferred aspect of the invention, by employing wafer processing and thick film technology to produce a miniature electromagnetic generator, the device can readily be batch fabricated, thus achieving low production cost. Furthermore, such devices are readily miniaturised, yet have high reliability as a result of using known production steps which are readily controllable.

The electromechanical generator of the present invention has particular application in the provision of electrical power to sensor systems. In accordance with the invention, typical application areas for such self powered intelligent sensor systems are: inside the body (e.g. human, animal); on rotating objects; within liquids such as molten plastic or setting concrete; structural monitoring such as within bridges, buildings, aircraft or roads; and environmental monitoring, such as pollution monitoring in fields.

The electromagnetic generator in accordance with the present invention has a number of potential uses and applications, particularly when miniaturised. For example, the electromagnetic generator is really useful in applications where cabling to a unit (e.g. a sensor unit) requiring electrical power is difficult and/or expensive and battery power is insufficient in the life of the unit, weight is important and from which there is a significant level of vibration available to harvest power. In some cases the vibration harvesting technology of the electromagnetic generator may be used to provide a charging facility to a battery powered system.

In one particularly preferred application, the electromagnetic generator of the present invention may be incorporated into Health and Usage Monitoring Systems (HUMS) for helicopters and fixed wing aircraft.

HUMS systems monitor vibration and other parameters related to helicopter (or other aircraft) condition and the number of hours flying in defined stress conditions. The installation of sensors and retrieving data from those devices is a major cost issue both at installation and also during planned maintenance. The benefits of the electromagnetic generator of the present invention are reduced installation costs and shorter time taken for maintenance. The sensor would be packaged with a local wire less transmission system and would transmit data to the HUMS monitoring system. Some advantages of using the electromagnetic generator powered sensor system is that the complexity of installing wiring on existing or new airframes is avoided and the weight of the cabling is eliminated. Also monitoring sensors can be mounted for short trial periods without high installation costs.

In another particularly preferred application, the electromagnetic generator of the present invention may be incorporated into sensing systems for railway lines and associated components.

The condition of railway lines and associated components is a matter of concern within the UK and probably throughout the world. It is known to provide sensor systems for sensing for rail condition and also the presence/absence of vital components. In some situations there is adequate local electrical power for driving a sensor. However, in other situations local electrical power may be unavailable or inconvenient, particularly for remote or distant sites, in which case there is a need for a self-powered sensor (e.g. a strain sensor) that could telemeter the output data to a single powered point (one for a large geographical area) or via a GPS link. The vibration for the sensor may be provided by the passage of a train, either directly from the rail line or via a cantilever attached to the line. Other railway infrastructure monitoring includes, for example, strain measurement in rails, ballast condition and height, and points monitoring.

In a yet further particularly preferred application, the electromagnetic generator of the present invention may be incorporated into a vehicle battery charger system, for example for lorry or truck trailers tracking battery recharging.

Articulated trailers need to be tracked for logistics applications. In this application the trailer is only powered when the trailer is connected to a tractor unit. Even then there may be no power available for a retrofitted tracking system. If the system is powered by a battery it would be an advantage to have an independent charging system that would charge the battery whilst the system was being towed. The charging system may incorporate the electromagnetic generator of the present invention. The battery would then be able to power the tracking system while the trailer was stationary and disconnected from the tractor unit.

In a still further particularly preferred application, the electromagnetic generator of the present invention may be incorporated into a mobile telecommunications equipment, for example military backpack telecommunications equipment (e.g. Bowman), which is powered by a battery. Batteries contribute to a significant proportion of the overall

weight of the equipment carried in the field. Clearly during field operation the equipment is subjected to considerable vibration. These vibrations could be transformed by the electromagnetic generator of the present invention into electrical power that is suitably conditioned for use in recharging the battery packs. The electromagnetic generator of the present invention can reduce the weight and maintain the power available of the telecommunications equipment, thereby providing real benefits to the user.

In other preferred applications, the electromagnetic generator of the present invention may be incorporated into a conditioning monitoring system which is increasingly used in a very wide field for many types of equipment. For example, the electromagnetic generator of the present invention may be used to power a vibration condition-monitoring sensor on any type of equipment.

## CLAIMS

1. An electromagnetic generator comprising two magnets and a coil disposed therebetween, the two magnets being configured to define therebetween a region of magnetic flux in which the coil is disposed whereby relative movement between the coil and the magnets generates an electrical current in the coil, and a vibratable first mount for each of the magnets and a vibratable second mount for the coil whereby each of the at least two magnets and the coil are respectively vibratable about a respective central position.
2. An electromagnetic generator according to claim 1 wherein the vibratable first mount and the vibratable second mount are adapted to vibrate out of phase when excited to vibrate by a common input of vibration energy, so that the coil and its respective magnets vibrate out of phase with each other.
3. An electromagnetic generator according to claim 2 wherein the vibratable first mount and the vibratable second mount are adapted to vibrate substantially in anti-phase when excited to vibrate by a common input of vibration energy, so that the coil and its respective magnets vibrate substantially in anti-phase with each other.
4. An electromagnetic generator according to any one of claims 1 to 3 wherein each of the vibratable first mount and the vibratable second mount comprises a cantilever beam.
5. An electromagnetic generator according to claim 4 wherein the cantilever beam of each vibratable first mount has substantially one half of the mass of the cantilever beam of the vibratable second mount.
6. An electromagnetic generator according to claim 5 wherein the cantilever beam of each vibratable first mount is substantially the same length as the cantilever beam of the vibratable second mount.

7. An electromagnetic generator according to any one of claims 4 to 6 wherein each magnet is mounted at a free end of the cantilever beam of each vibratable first mount and the coil is mounted at a free end of the cantilever beam of the vibratable second mount.
8. An electromagnetic generator according to any foregoing claim wherein each of the vibratable first mount and the vibratable second mount are mounted on a common base.
9. An electromagnetic generator according to claim 8 wherein each of the vibratable first mount and the vibratable second mount are integral with the common base.
10. An electromagnetic generator according to any foregoing claim wherein the at least two magnets and the coil are mounted along a common axis.
11. An electromagnetic generator according to any one of claims 1 to 9 wherein the at least two magnets and coil are mounted along a common line defining a polygon or a portion thereof.
12. An electromagnetic generator according to claim 11 wherein the polygon is a circle.
13. An electromagnetic generator according to any foregoing claim, comprising a plurality of the coils and more than two of the magnets, each coil being disposed between a respective pair of the magnets.
14. An electromagnetic generator according to claim 13 wherein at least one of the magnets is disposed between a pair of the coils and thereby comprises a common magnet for adjacent coils.
15. An electromagnetic generator according to claim 13 wherein each coil is associated with and disposed between a respective pair of the magnets so that each coil and its associated magnets comprise an independent resonating structure having a resonating



mode that is substantially decoupled from other resonating structures comprised of other coil and magnet combinations.

16. An electromagnetic generator according to any one of claims 13 to 15 wherein the plurality of the coils have at least two resonant frequencies when vibrated on their respective second vibratable mount.

17. An electromagnetic generator comprising first and second coils each disposed between a respective pair of magnets which are configured to define therebetween a region of magnetic flux in which the respective coil is disposed whereby relative movement between the respective coil and the respective magnets generates an electrical current in the respective coil, and wherein the first and second coils each have different respective resonant frequencies when vibrated relative to their respective magnets.

18. An electromagnetic generator according to claim 17 wherein at least one of the magnets is disposed between the first and second coils, which are adjacent, and thereby comprises a common magnet for the first and second adjacent coils.

19. An electromagnetic generator according to claim 17 wherein each of the first and second coils is associated with and disposed between a respective pair of the magnets so that each coil and its associated magnets comprise an independent resonating structure having a resonating mode that is substantially decoupled from the other resonating structure comprised of the other coil and magnet combination.

20. An electromagnetic generator according to any one of claims 17 to 19 further comprising a vibratable first mount for each of the magnets and a vibratable second mount for each of the first and second coils whereby each of the at least two magnets and the respective first or second coil are respectively vibratable about a respective central position.

21. An electromagnetic generator according to claim 20 wherein the vibratable first mount and the vibratable second mount are adapted to vibrate out of phase when excited to

vibrate by a common input of vibration energy, so that the coil and its respective magnets vibrate out of phase with each other.

22. An electromagnetic generator according to claim 21 wherein the vibratable first mount and the vibratable second mount are adapted to vibrate substantially in anti-phase when excited to vibrate by a common input of vibration energy, so that the coil and its respective magnets vibrate substantially in anti-phase with each other.

23. An electromagnetic generator according to any one of claims 19 to 22 wherein each of the vibratable first mount and the vibratable second mount comprises a cantilever beam.

24. An electromagnetic generator according to claim 23 wherein the cantilever beam of each vibratable first mount for a pair of the magnets has substantially one half of the mass of the cantilever beam of the vibratable second mount for the associated coil.

25. An electromagnetic generator according to claim 24 wherein the cantilever beam of each vibratable first mount is substantially the same length as the cantilever beam of the vibratable second mount.

26. An electromagnetic generator according to any one of claims 23 to 25 wherein each magnet is mounted at a free end of the cantilever beam of each vibratable first mount and each coil is mounted at a free end of the cantilever beam of a respective vibratable second mount.

27. An electromagnetic generator according to any one of claims 19 to 26 wherein each of the vibratable first mount and the vibratable second mount are mounted on a common base.

28. An electromagnetic generator according to claim 27 wherein each of the vibratable first mount and the vibratable second mount are integral with the common base.

29. An electromagnetic generator according to any one of claims 19 to 28 wherein the magnets and the first and second coils are mounted along a common axis.
30. An electromagnetic generator according to any one of claims 19 to 29 wherein the magnets and the first and second coils are mounted along a common line defining a polygon or a portion thereof.
31. An electromagnetic generator according to claim 30 wherein the polygon is a circle.
32. A health and usage monitoring system (HUMS) for an aircraft, the system incorporating at least one electromagnetic generator according to claim 1 or claim 17.
33. A health and usage monitoring system (HUMS) for an aircraft according to claim 32, the system including a sensor and a local wire less transmission system, both the sensor and the wire less transmission system being powered by the electromagnetic generator.
34. A sensing system for railway lines and associated components, the system incorporating at least one electromagnetic generator according to claim 1 or claim 17.
35. A sensing system for railway lines and associated components according to claim 34, wherein the electromagnetic generator is adapted to generate power from the vibration provided by the passage of a train, either directly from the rail line or via a cantilever attached to the rail line.
36. A sensing system for railway lines and associated components according to claim 35, wherein the sensing system includes a sensor and means to telemeter the output data to a remote location.
37. A vehicle battery charger system incorporating at least one electromagnetic generator according to claim 1 or claim 17.

38. A vehicle battery charger system according to claim 37 incorporated into a battery recharging system for a tracking system for a lorry or truck trailer.

39. A mobile telecommunications equipment incorporating at least one electromagnetic generator according to claim 1 or claim 17.

40. A conditioning monitoring system incorporating at least one electromagnetic generator according to claim 1 or claim 17.

41. An electromagnetic generator substantially as hereinbefore described with reference to the accompanying drawings.

## ABSTRACT

### An electromagnetic device for converting mechanical vibrational energy into electrical energy

An electromagnetic generator comprising two magnets and a coil disposed therebetween, the two magnets being configured to define therebetween a region of magnetic flux in which the coil is disposed whereby relative movement between the coil and the magnets generates an electrical current in the coil, and a vibratable first mount for each of the magnets and a vibratable second mount for the coil whereby each of the at least two magnets and the coil are respectively vibratable about a respective central position.

[Figure 2]

1/3

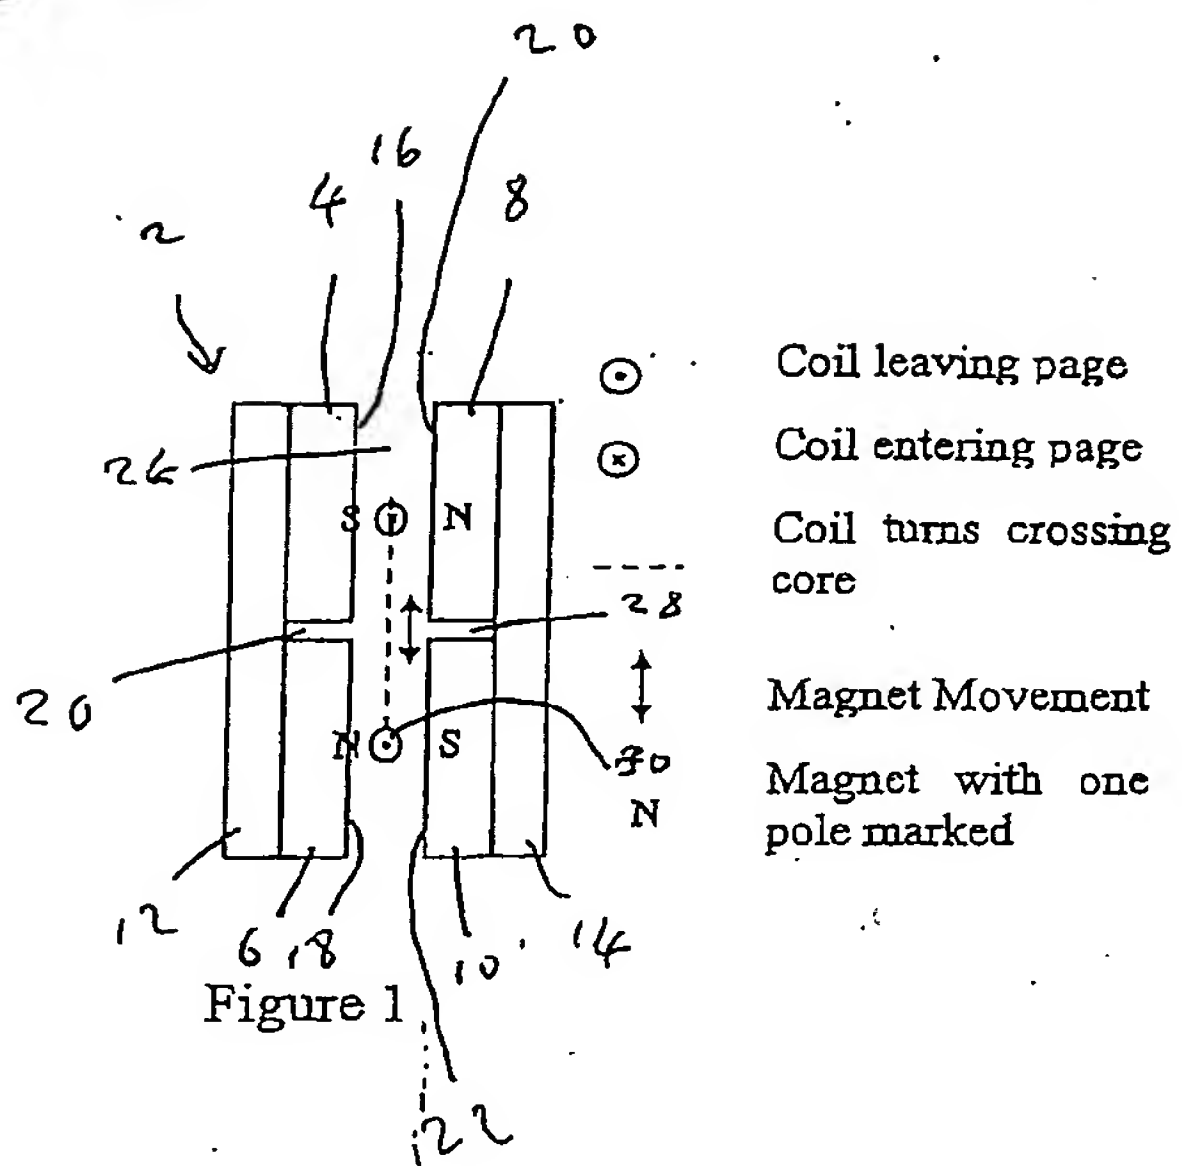


Figure 2

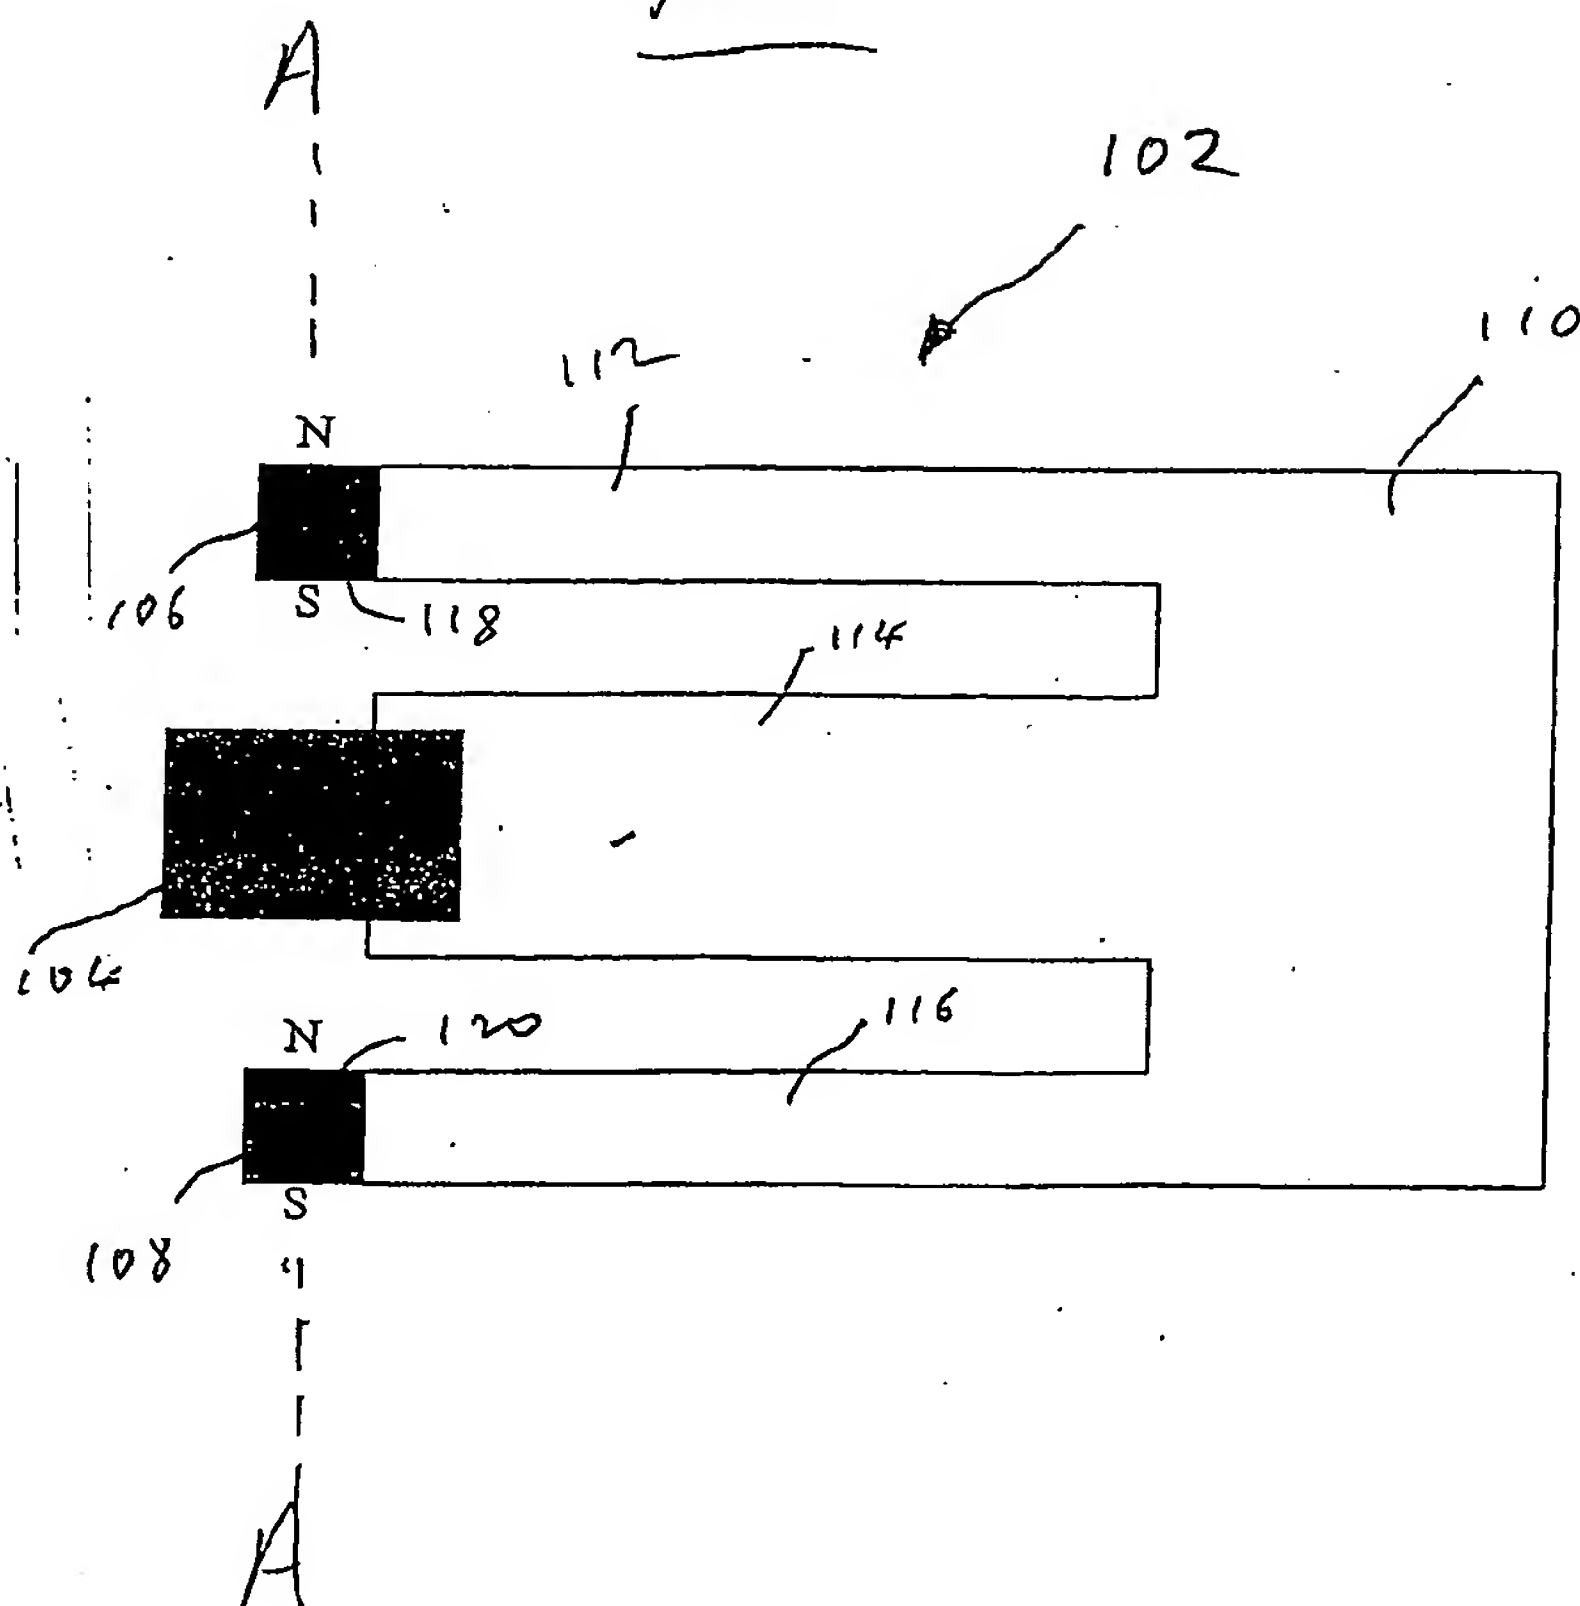




Figure 3


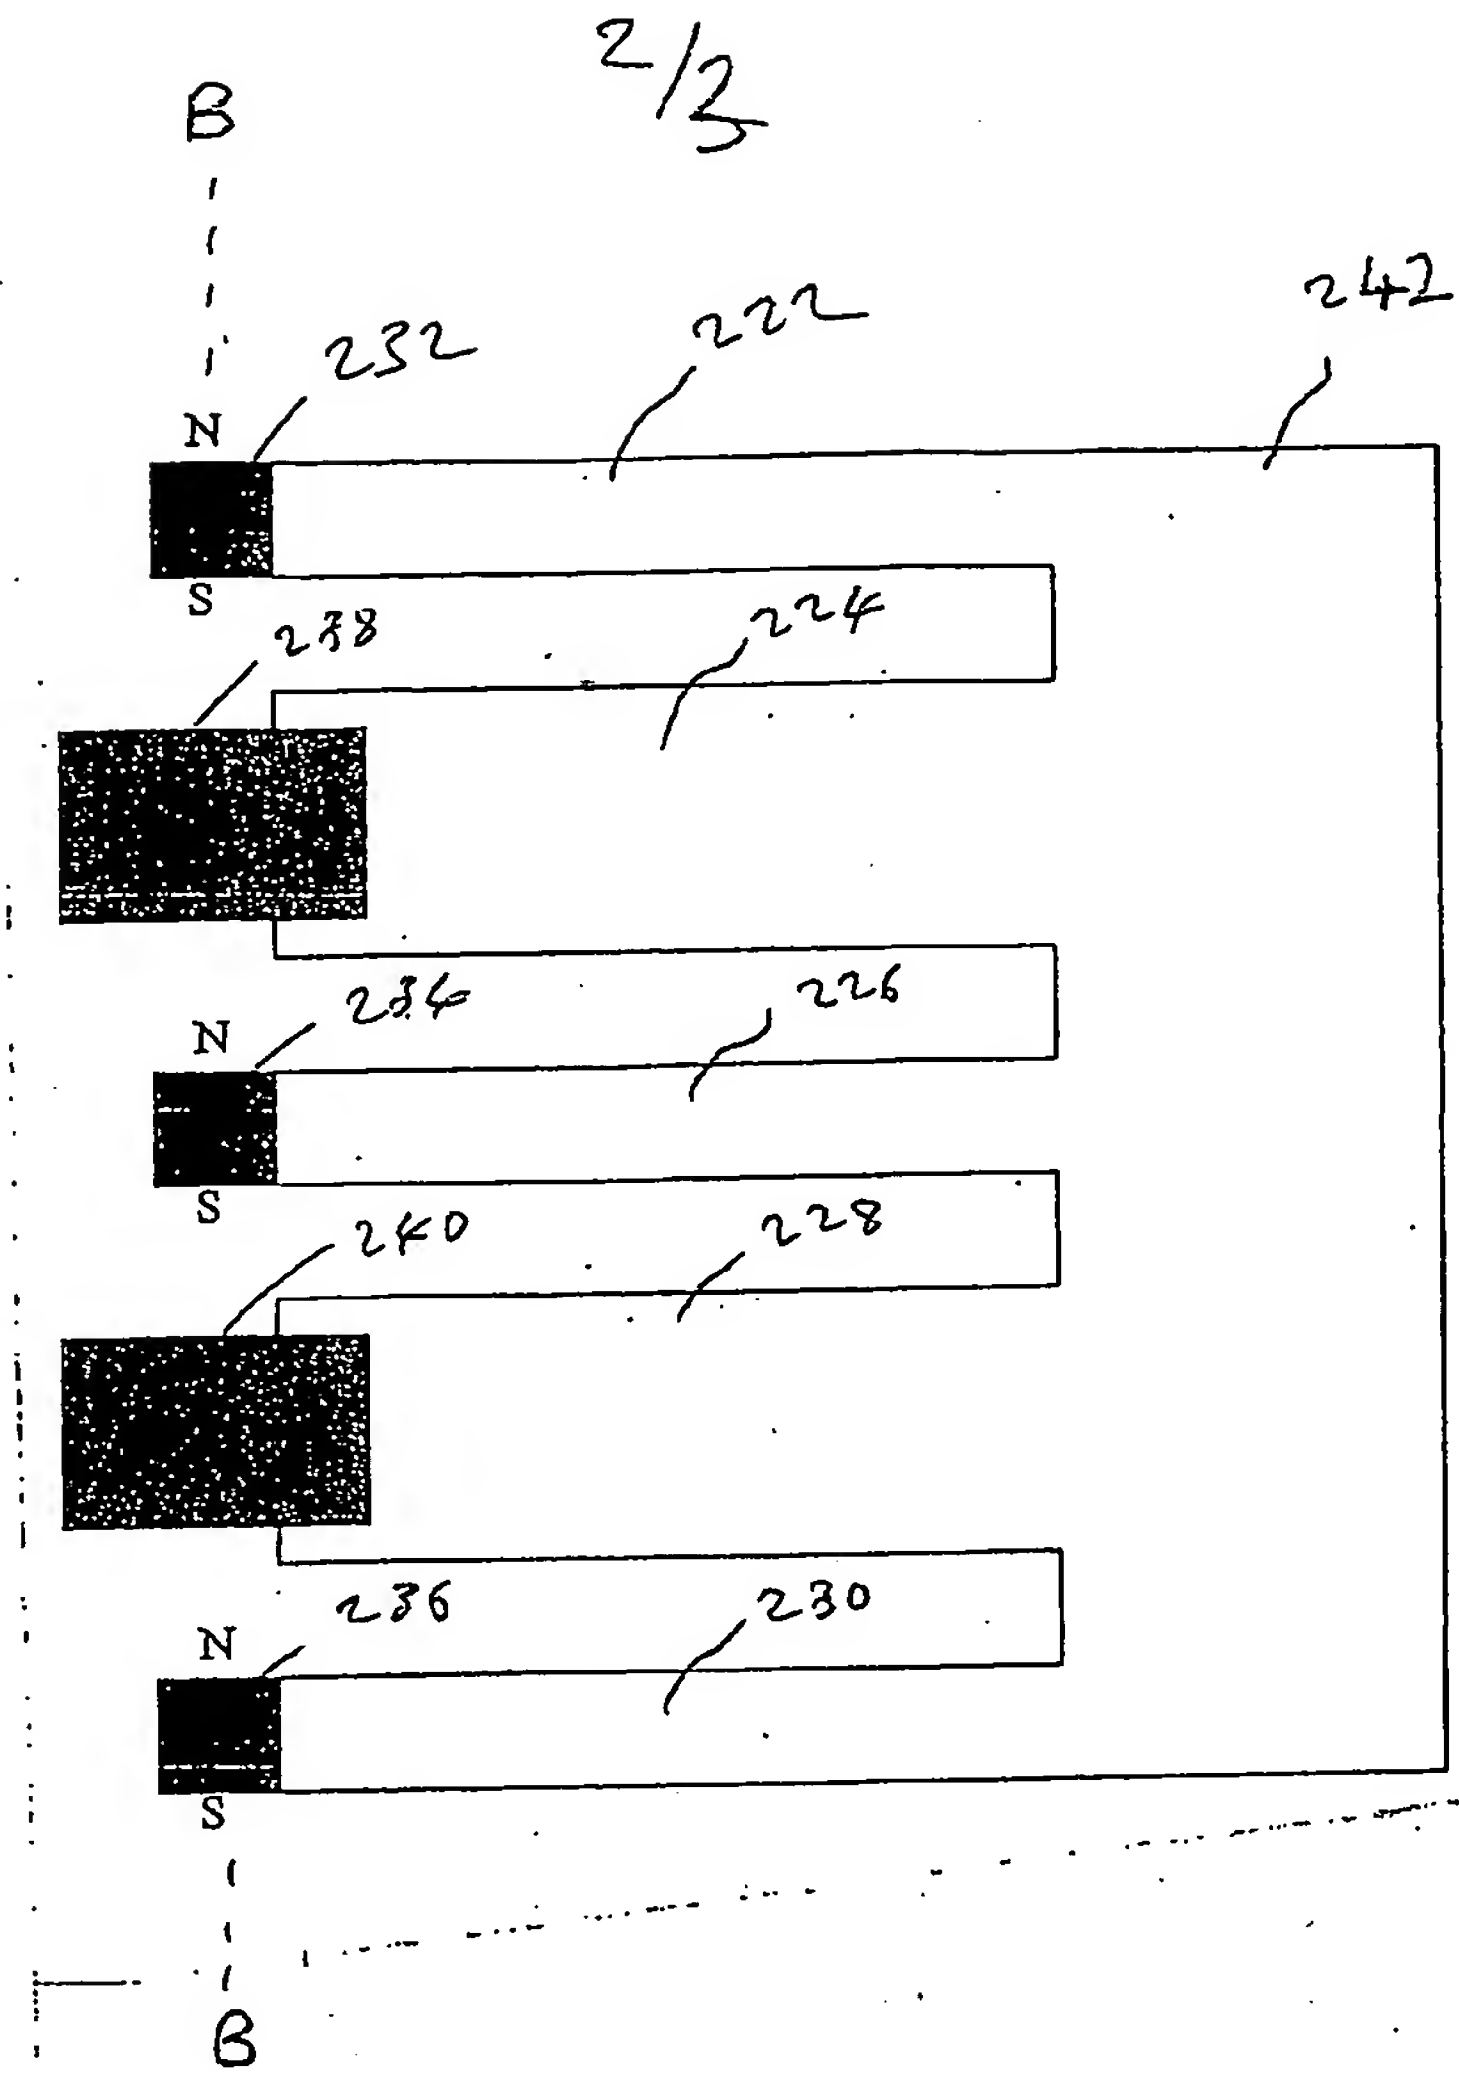


Figure 4



3/3

Figure 4

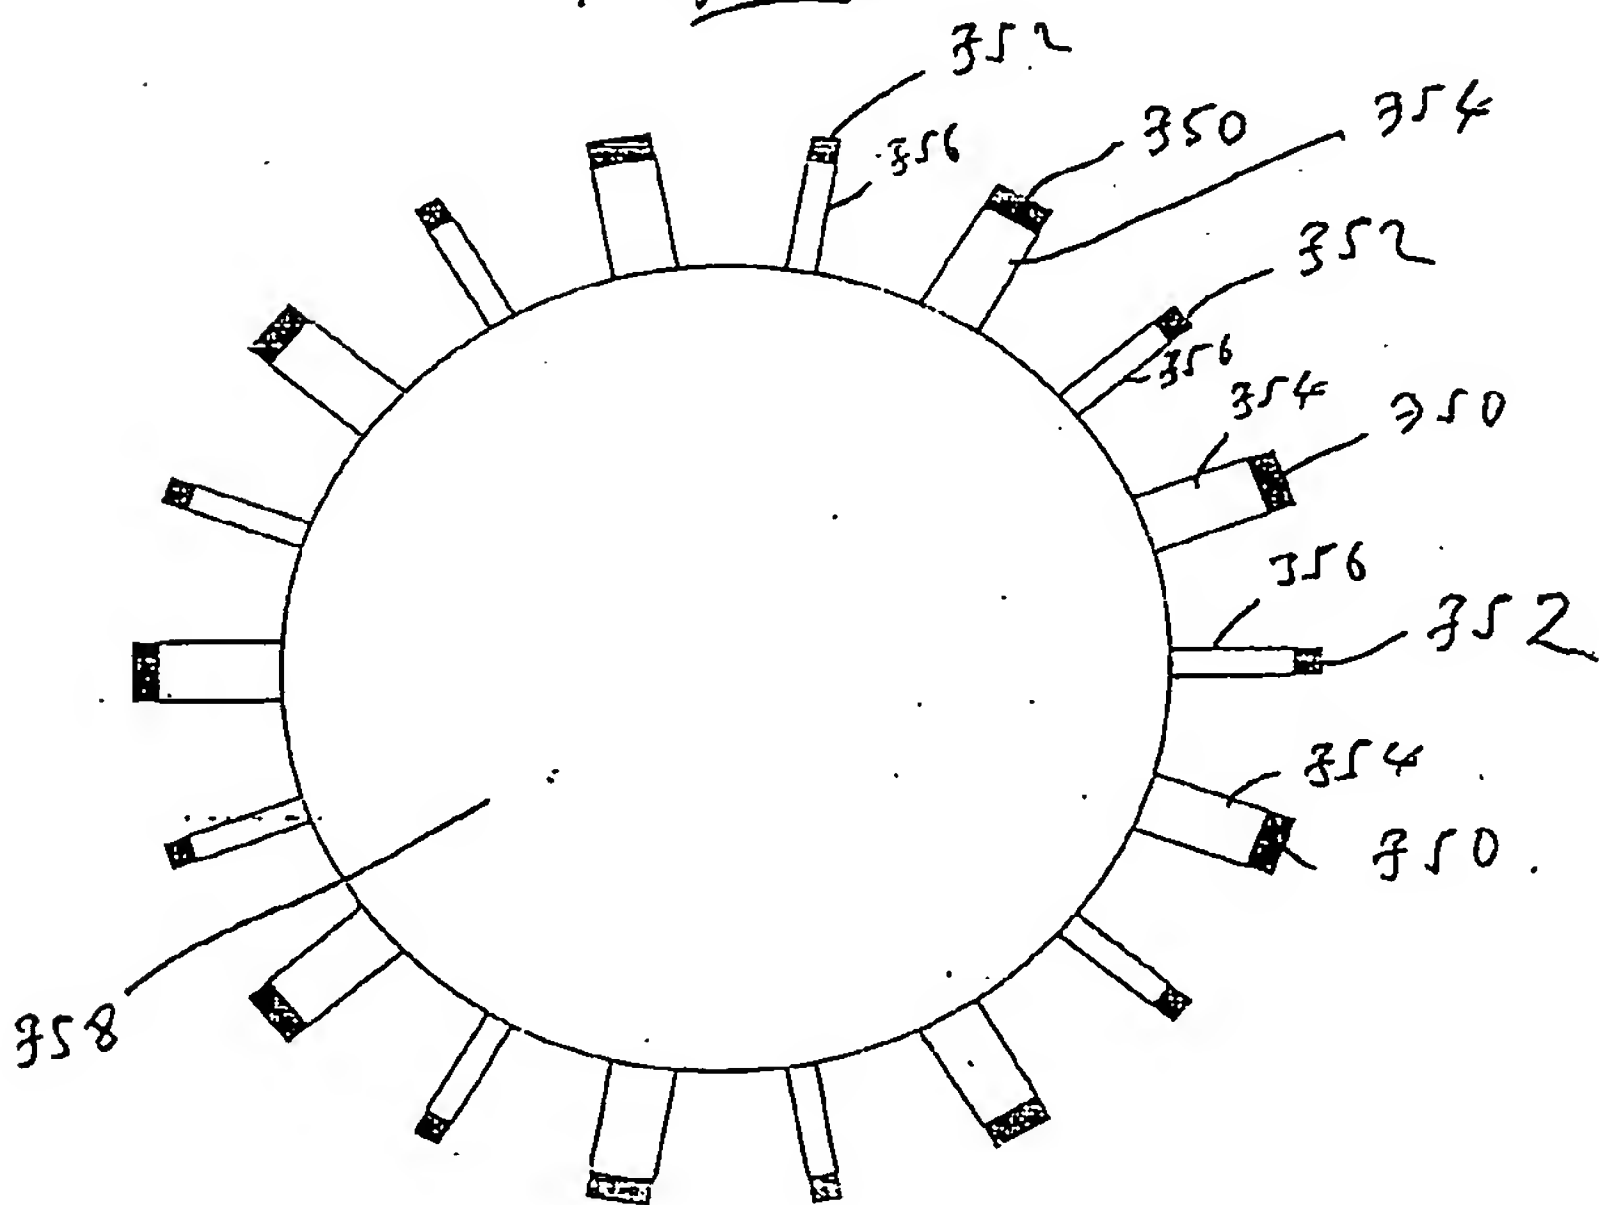